

Fig. 1

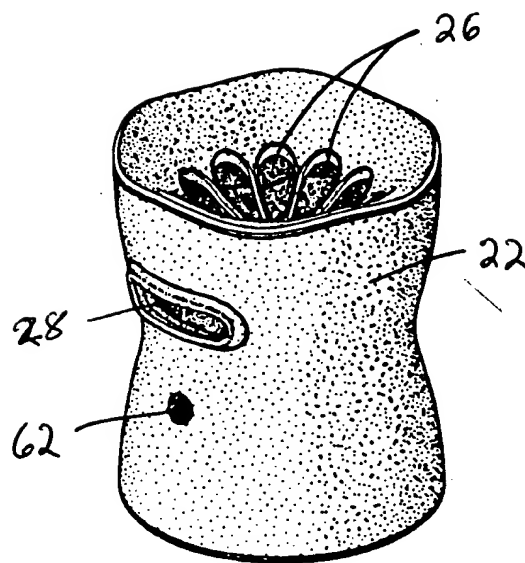


Fig. 2

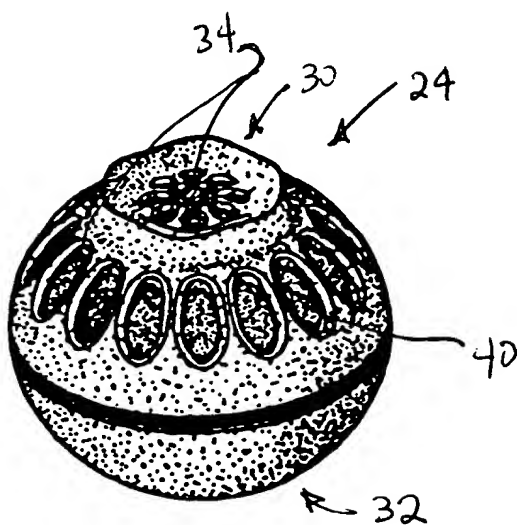


Fig. 3

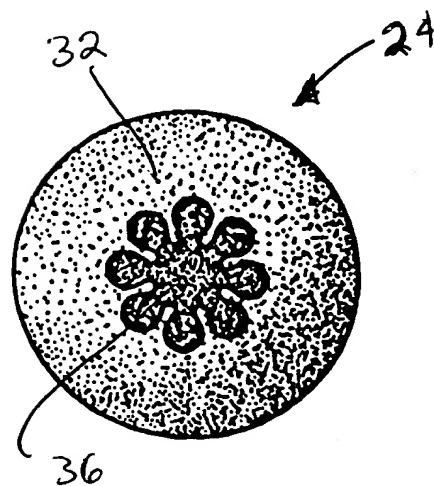


Fig. 4

This exploded perspective view shows the assembly of the device. At the top is a bowl-shaped component 26 with a central protrusion 43. Below it is a circular plate 46 with a series of vertical slots. The main body 10 is a cylindrical component with two side-mounted actuators 28, each featuring a knob 44 and a lever 42. A small pin 62 is shown near the bottom of the main body. Below the main body is a cylindrical component 50 with internal structures 52. This is followed by a component 54 with a circular face 56 and a protrusion 58. At the bottom is a circular base 60 with a central pin 68. A reference numeral 22 with an arrow points to the top of the assembly.

Fig. 5

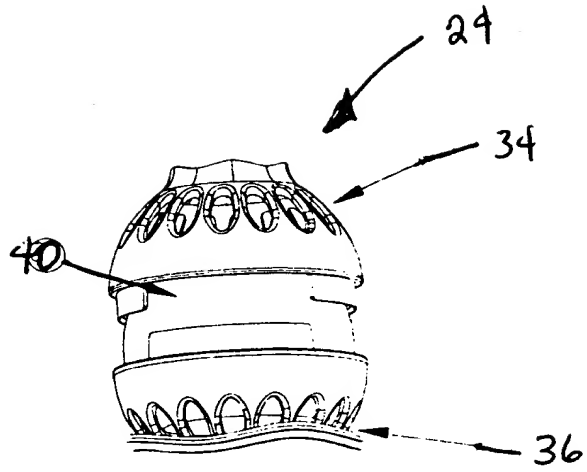


Fig 6

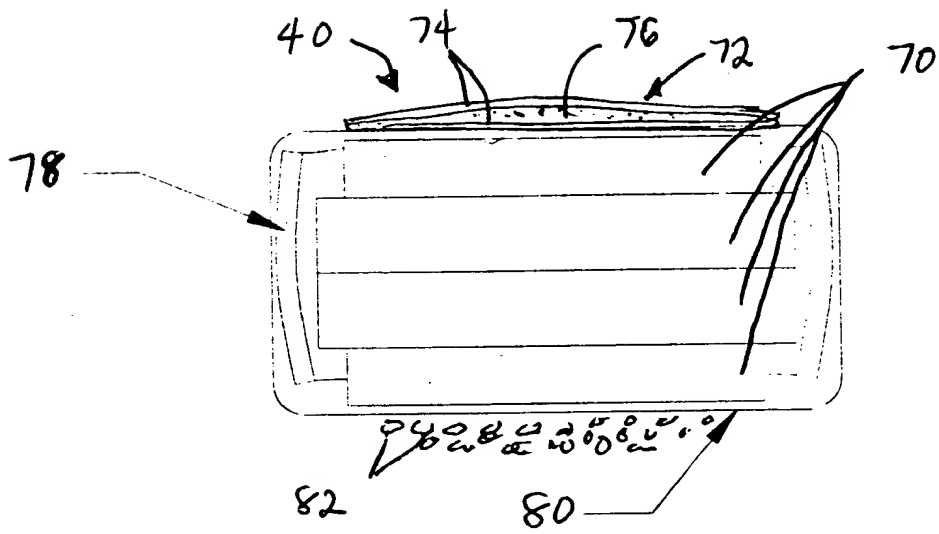


Fig. 7

Fig. 8.

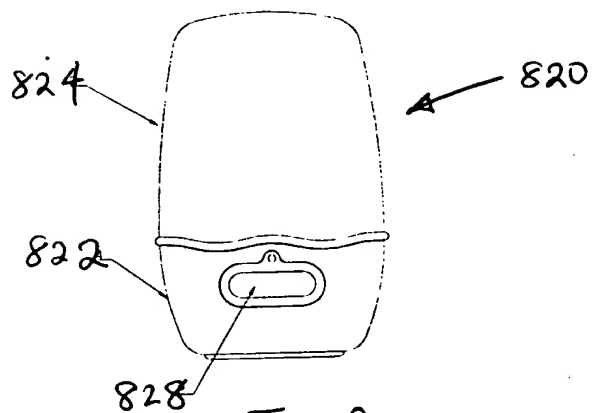
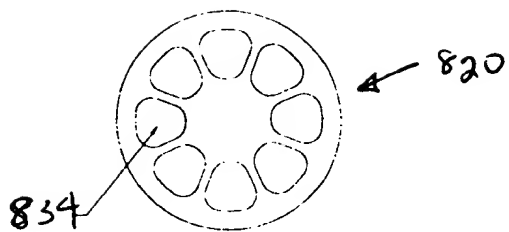


Fig. 9

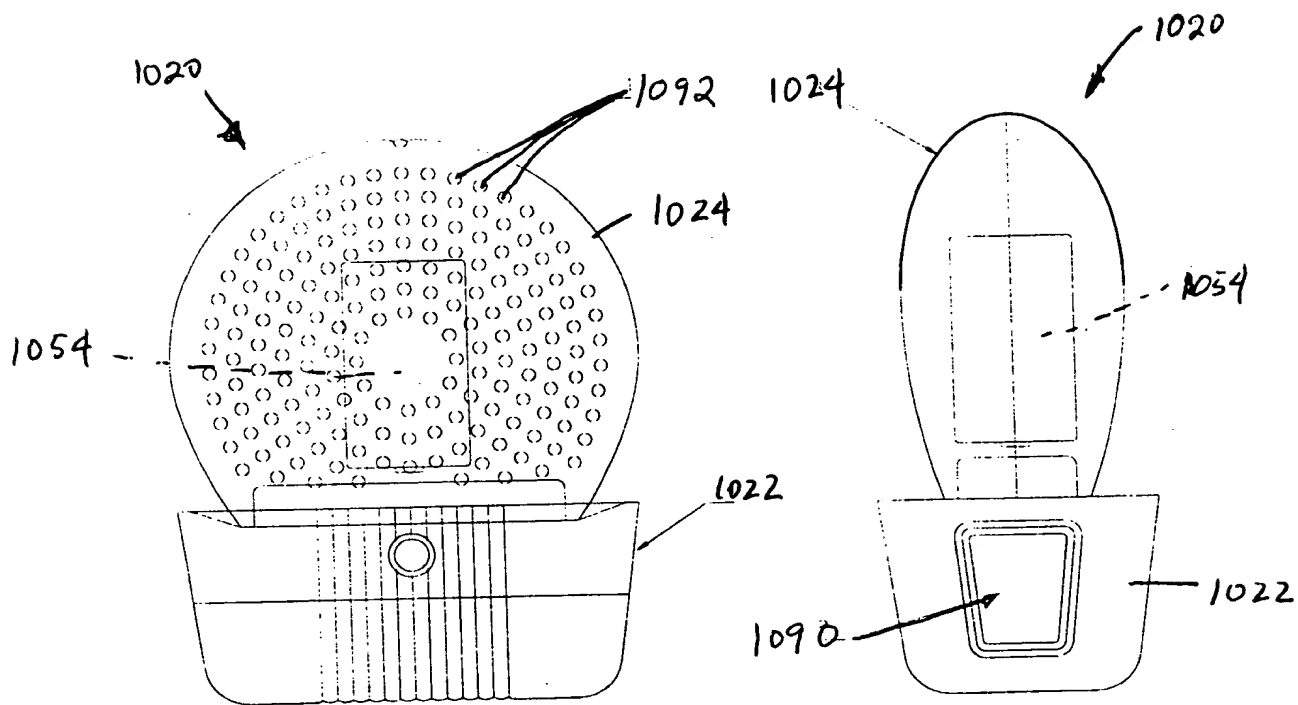


Fig. 10

Fig. 11